

www.NEXGENbalers.com

800-633-8974 or 205-695-9105

# Gemini 3560<sup>®</sup>



*The Gemini<sup>®</sup> Series Balers can be fitted with an Above Floor or a Pit Conveyor.*

## Gemini Series Multi-Material Manual-Tie Balers

NEXGEN's Gemini 3560<sup>®</sup> & Gemini-Xtreme<sup>®</sup> Balers are moderate duty, closed-end horizontal balers that allows you to process a variety of material such as PET, aluminum or steel cans, paper, plastics, OCC, newsprint, and similar material with no fluffing or preconditioning. They feature:

- ▼ Full penetration ram for maximum compaction and full bale ejection
- ▼ Programmable, UL Listed controller permits automatic or manual operation
- ▼ Twin cross-cylinders with 20 HP motor
- ▼ Cycle time of 34 seconds
- ▼ Bale size 30" H x 48" L x 60" W
- ▼ Wire guides for quick and easy ties
- ▼ Wire guides designed for quick clean-out


# GEMINI X<sup>TM</sup>TREME



**Bale size:**  
48"L x 60"W x 30"H

**Bale weights  
(OCC):**  
1100-1400 lbs.

**NEXGEN**  
BALING SYSTEMS

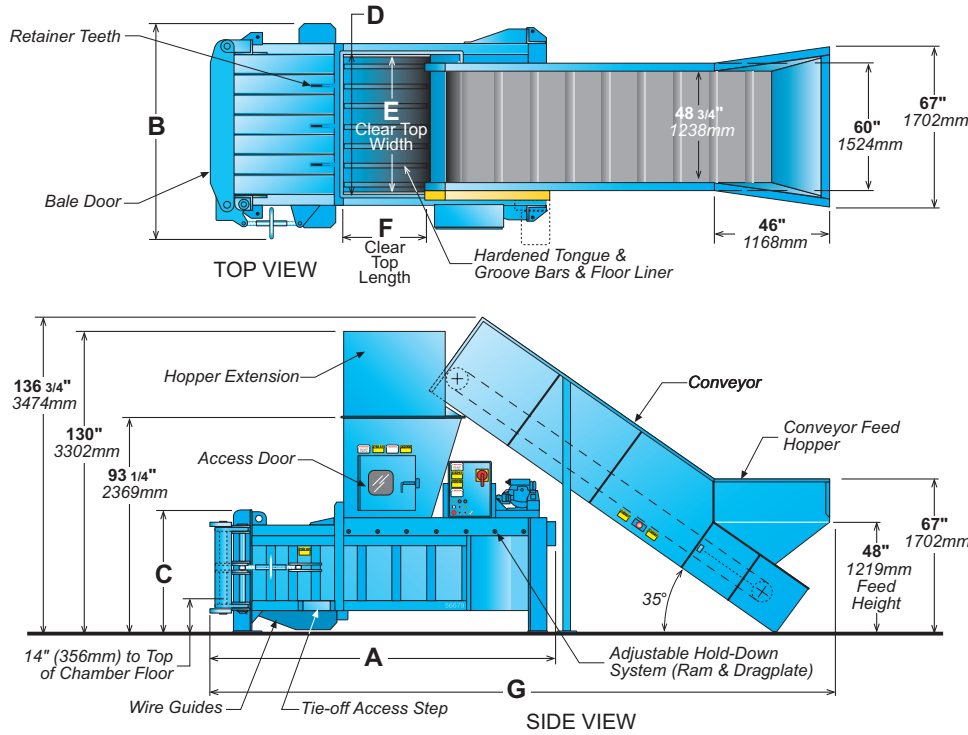

## Gemini Series Multi-Material Horizontal Balers

### Features & Benefits:

- ▼ Hardened steel tongue & groove floor and side liners (Gemini-Xtreme only)
- ▼ Adjustable cold roll bar assembly hold-down system with integrated drag plate for ram (Gemini-Xtreme only)
- ▼ Programmable controller permits automatic or manual control
- ▼ Available above floor or pit variable speed conveyor
- ▼ High efficiency power unit with horsepower limited, pressure compensated piston pump
- ▼ Hopper with access door with interlock and viewing port
- ▼ Electrical disconnect
- ▼ Reversible and adjustable bolt-on shear blade (Gemini-Xtreme only)
- ▼ Welded body shear blade and serrated ram shear bar (Gemini 3560)
- ▼ Full penetration ram for maximum compaction and complete bale ejection
- ▼ Nylon runners for smooth ram operation
- ▼ Dual interlock on bale chamber door
- ▼ Lower photocell control
- ▼ Wire guides for tying through the bale chamber door
- ▼ Wire guides designed for quick clean-out
- ▼ Totally enclosed, fan-cooled (TEFC) motor for worry-free, efficient operation
- ▼ Available with optional hydraulic bale door release
- ▼ Backed by NEXGEN's extensive baler warranty

### Specifications:

	Gemini 3560	Gemini-Xtreme
<b>A</b> Structure Length	147 1/4" (3740 mm)	149" (3785 mm)
<b>B</b> Structure Width	86 7/8" (2207 mm)	92 1/2" (2350 mm)
<b>C</b> Body Height	51 1/8" (1299 mm)	52 1/2" (1334 mm)
<b>D</b> Charge Chamber Width	60" (1524 mm)	60" (1524 mm)
<b>E</b> Charge Box Width	57" (1448 mm)	54 3/4" (1391mm)
<b>F</b> Charge Box Length	35" (889 mm)	35" (889 mm)
<b>G</b> Structure Length with Conveyor	266" (6756 mm)	269" (6833 mm)

### Hydraulic / Electric Equipment:

Programmable Controller	Standard	Standard
Motor	20 hp (15 kW)	20 hp (15 kW)
Control Voltage	460 VAC, 3 phase	460 VAC, 3 phase
Control Panel	UL Listed	UL Listed
Pump (4000 psi rated)	34 gpm (129 L/min.)	34 gpm (129 L/min.)
Cylinders (2) Bore	6" (152mm)	6" (152mm)
Rod	4" (102mm)	4" (102mm)
Stroke	57" (1448mm)	57" (1448mm)
Oil Reservoir Capacity	100 gal. (379 liters)	100 gal. (379 liters)

### Performance Characteristics:

Standard Operating Pressure	2450 psi (169 bar)	3000 psi (206 bar)
Platen Force	120,000 lbs. (534 kN)	147,300 lbs. (655 kN)
Platen Pressure	68 psi (469 kPa)	81.8 psi (564 kPa)
Cycle Time	34 seconds	34 seconds
Nominal Baler Size	30"H x 48"L x 60"W (762 x 1219 x 1524)	30"H x 48"L x 60"W (762 x 1219 x 1524)
Bale Weight (OCC)	Up to 1250 lbs. (567 kg)	Up to 1400 lbs. (635 kg)
Baler Weight	12,000 lbs. (5443 kg)	17,500 lbs. (7938 kg)

Visit us on-line at: [www.NEXGENbalers.com](http://www.NEXGENbalers.com)



**Blue Machinery (Advanced Technologies) Ltd.**  
 Appleton Thorn Trading Estate, Warrington WA4 4SN.  
 Tel: 0845 230 4460 Fax: 0845 658 2314  
 Email: sales@bluemachinery.com  
 Web: www.bluemachinery.com

Pictures in this literature are illustrative only. Specifications are subject to change without notice in order to accommodate improvements to the equipment. Certified in compliance with ANSI Regulation Z245.5 and all OSHA standards. Products must be used with safe practice and in accordance with said regulations and standards. Products also CE approved.